




Product Size

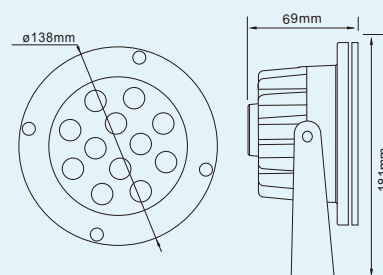

Specification

Model No.:	RS-LS12W(88425)
Front cover & Housing:	Aluminum body
Dimensions:	D138*H181mm
Tempered Glass:	8mm thickness
LED chip:	Cree
LED Q'ty:	12pcs 1W LED
Cable gland:	Nickel plated brass PG9
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 30° 45° 60° 90°
Power Cable:	2*1.0mm ² / 3*0.75mm ² / 4*0.75mm ² / 2*1.0mm ² +3*0.75mm ² VDE rubber cable
Protection Class:	IP65
Environment:	Dry
Mounting Hardware:	Wall, ceiling, floor, pole mounting
Net Weight:	1kgs with 1m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88425.121.01	2700-3000K	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	1080
88425.121.02	4000-4500K	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	1140
88425.121.03	5000-5500K	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	1200
88425.121.04	6000-6500K	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	1200
88425.121.05	Red	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	300
88425.121.06	Green	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	720
88425.121.07	Blue	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	360
88425.121.08	Yellow	12*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 54-108	12	840
88425.121.09	RGB-DMX512 (3 channel)	12*1	V+/V- /D+/D-/GND	DC24	R: 166 G: 166 B: 166	R: 4 G: 4 B: 4	R: 100 G: 240 B: 120
88425.121.10	Auto changing color	12*1	V+/V-	AC12-24	R: 333 / 166 B: 333 / 166	R: 4 G: 4 B: 4	R: 100 G: 240 B: 120
88425.121.12	RGBV+ (build-in CC driver)	12*1	R/G/B/V+	DC24	R: 166 G: 166 B: 166	R: 4 G: 4 B: 4	R: 100 G: 240 B: 120

