




### Product Size

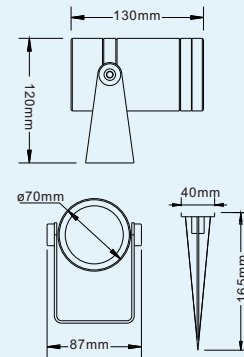

### Specification

<b>Model No.:</b>	RS-LS24W70(88438)
<b>Front cover &amp; Housing:</b>	Aluminum body
<b>Dimensions:</b>	D70*H335mm(Max.); D70*H120mm(Min.)
<b>Tempered Glass:</b>	3mm thickness
<b>LED chip:</b>	Cree
<b>LED Q'ty:</b>	1pc 24W LED
<b>Cable gland:</b>	Nickel plated brass PG9
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Reflector
<b>Beam Angle Options:</b>	15° 24° 38°
<b>Power Cable:</b>	3*0.75mm <sup>2</sup> / 5*0.75mm <sup>2</sup> / 2*1.0mm <sup>2</sup> +3*0.75mm <sup>2</sup> VDE rubber cable
<b>Protection Class:</b>	IP65
<b>Environment:</b>	Dry
<b>Mounting Hardware:</b>	Wall, ceiling, floor, pole mounting
<b>Net Weight:</b>	1.2kgs with 1m cable
<b>Lifetime:</b>	>50000H

### Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88438.241.01	2700-3000K	1*24	L/N/G	AC90-230	109-218	24	2640
88438.241.02	4000-4500K	1*24	L/N/G	AC90-230	109-218	24	2760
88438.241.03	5000-5500K	1*24	L/N/G	AC90-230	109-218	24	2880
88438.241.09	6000K; RGBW-DMX512 (4 channel)	1*24	V+/V-/D+/D-GND	DC24	R: 250 G: 250 B: 250 W: 250	R: 6 G: 6 B: 6 W: 6	R: 150 G: 360 B: 180 W: 540
88438.241.12	6000K; RGBWW+ (build-in CC driver)	1*24	R/G/B/W/V+	DC24	R: 250 G: 250 B: 250 W: 250	R: 6 G: 6 B: 6 W: 6	R: 150 G: 360 B: 180 W: 540

