




## Product Size

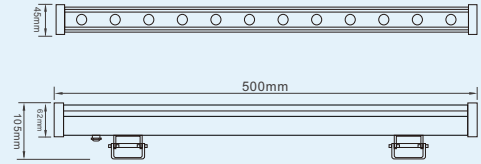

## Specification

<b>Model No.:</b>	RS-WW36W-BS(88305)
<b>Front cover &amp; Housing:</b>	Aluminum body
<b>Dimensions:</b>	L500*W45*H62mm(H105mm with bracket)
<b>Tempered Glass:</b>	3mm thickness
<b>LED chip:</b>	Epistar
<b>LED Q'ty:</b>	12pcs 3in1 LED
<b>Cable gland:</b>	Nickel plated brass PG9
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Clear, Bead, Frosted
<b>Beam Angle Options:</b>	10° 30° 45° 60° 90°
<b>Power Cable:</b>	2*1.0mm <sup>2</sup> / 4*0.75mm <sup>2</sup> / 2*1.0mm <sup>2</sup> +3*0.75mm <sup>2</sup> VDE rubber cable
<b>Protection Class:</b>	IP65
<b>Environment:</b>	Dry
<b>Mounting Hardware:</b>	Wall Mounted System
<b>Net Weight:</b>	1.6kgs with 1m cable
<b>Lifetime:</b>	>50000H

## Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88305.123.01	RGB-DMX512 (3 channel)	12*3in1	V+/V- /D+/D-/GND	DC24	R: 500 G: 500 B: 500	R: 12 G: 12 B: 12	R: 300 G: 720 B: 360
88305.123.02	Auto changing color	12*3in1	V+/V-	AC24	R: 500 G: 500 B: 500	R: 12 G: 12 B: 12	R: 300 G: 720 B: 360
88305.123.04	RGBV+ (build-in CC driver)	12*3in1	R/G/B/V+	DC24	R: 500 G: 500 B: 500	R: 12 G: 12 B: 12	R: 300 G: 720 B: 360

