




## Product Size

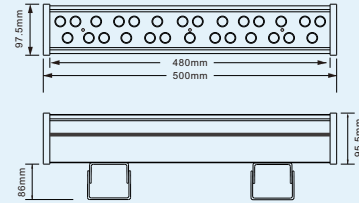

## Specification

<b>Model No.:</b>	RS-WW81W-CS(88311)
<b>Front cover &amp; Housing:</b>	Aluminum body
<b>Dimensions:</b>	L500*W98*H95mm(H180mm with bracket)
<b>Tempered Glass:</b>	4mm thickness
<b>LED chip:</b>	Epistar
<b>LED Q'ty:</b>	27pcs 3W LED
<b>Cable gland:</b>	Nickel plated brass PG9
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Clear, Bead, Frosted
<b>Beam Angle Options:</b>	10° 30° 45° 60° 90°
<b>Power Cable:</b>	2*1.0mm <sup>2</sup> / 3*0.75mm <sup>2</sup> / 4*0.75mm <sup>2</sup> / 2*1.0mm <sup>2</sup> +3*0.75mm <sup>2</sup> VDE rubber cable
<b>Protection Class:</b>	IP65
<b>Environment:</b>	Dry
<b>Mounting Hardware:</b>	Wall Mounted System
<b>Net Weight:</b>	4kgs with 1m cable
<b>Lifetime:</b>	>50000H

## Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88311.273.01	2700-3000K	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	3780
88311.273.02	4000-4500K	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	3996
88311.273.03	5000-5500K	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	4185
88311.273.04	6000-6500K	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	4185
88311.273.05	Red	27*3	V+/V- or L/N/G	DC36, AC90-230	1500 / 368-736	54	945
88311.273.06	Green	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	2430
88311.273.07	Blue	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	1080
88311.273.08	Yellow	27*3	V+/V- or L/N/G	DC36, AC90-230	2250 / 368-736	81	2565
88311.273.09	RGB-DMX512 (3 channel)	27*3	V+/V- /D+/D-	DC36	R: 500 B: 750 G: 750	R: 18 B: 27 G: 27	R: 315 B: 360 G: 810
88311.273.12	RGBV+ (build-in CC driver)	27*3	R/G/B/V+	DC36	R: 500 B: 750 G: 750	R: 18 B: 27 G: 27	R: 315 B: 360 G: 810

